



Client:	
Order #:	
Project:	
Type:	

PERFORMANCE DATA

CRI

80+

CCT

3500K, 4000K, 5000K

Projected Lifetime

173,000 Hours (L70);
50,000 Hours (L90)

Dimming

0-10V Dimming Standard,
10% to 100%

Operating Temperature

-30°C to +50°C Ambient

Safety Listed

UL and cUL, Suitable for dry and damp locations; IC-rated

Warranty

5 year Standard
10 year Optional

DESCRIPTION

The design-driven Vortex LED Fixture features easy installation and delivers a cost-saving solution for upgrading fluorescent troffers or parabolics to LED technology. Ideal for commercial applications such as offices, classrooms, healthcare facilities, and retail spaces. The Vortex LED Fixtures come standard dimmable and offer the most advanced LED technology on the market with efficacies of up to 152 lumens per watt. GO-LED Fixtures are manufactured with quality components and finishes, resulting in consistent and balanced lighting when mixing configurations in the same space. A main diffuser and slanted troffer reduce the Vortex's glare to provide soft, dispersed illumination with the comfort of inhabitants in mind. With their visual appeal and ease of installation, the Vortex will transform and revamp any space in minutes.

FEATURES

- High reflectance optical engine delivers main beam focus through the optically designed acrylic lens.
- Linear ribbed acrylic lens overlay manages the balance of efficiency and aesthetics.
- Delivers efficacy of up to 152 lm/W
- Linear arrayed LED modules provide soft, but effective illumination.
- Ideal for recessed commercial applications such as office spaces, hospitals, educational facilities, transportation centers, etc.
- Frosted acrylic lens easily removes for cleaning.
- Dimming (0-10V) and Architectural Narrow lens are standard.
- FCC Compliant
- Switchable CCT allows users to select between 4000K, 3500K, and 3000K in the field by simply switching an easily accessible three position switch. Fixture comes set/standard at 40K.

ORDERING INFORMATION

VORTEX						
	B	C	D	E	F	G

A	FIXTURE SERIES	
	Vortex	Architectural LED Fixture
B	SIZE	
	22	2' x 2'
	24	2' x 4'
C	WATTAGES/LUMENS (2'X2')	
	24	24W/3600 ¹
	39	39W/5694 ¹
	WATTAGES/LUMENS (2'X4')	
	32	32W/4864 ¹
	39	39W/5772 ¹
D	CCT	
	354050	3500K-4000K-5000K
E	VOLTAGE	
	U	120-277V

F	OPTIONS	
	E	Emergency
	AR	Air Supply/Return ²
G	WARRANTY³	
	BLANK	5 Year Warranty
	10	10 Year Warranty
	10L	10 Year Warranty including labor

¹Delivered Lumens (4000K). For full lumen chart please see page 2

²Consult factory for details


³5 year standard unless specified




DIMENSIONS

	X₁	X₂	X₃
2X2	23.78"	23.78"	3.70"
2X4	47.80"	23.78"	3.70"

2x2

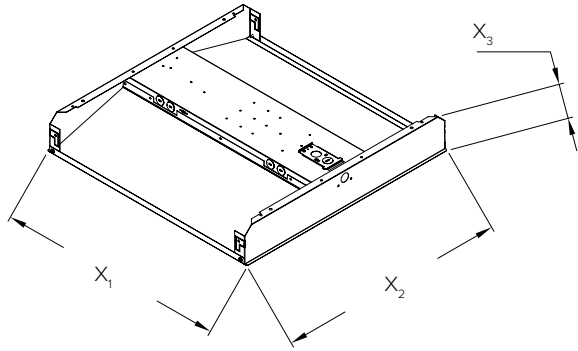

2x4

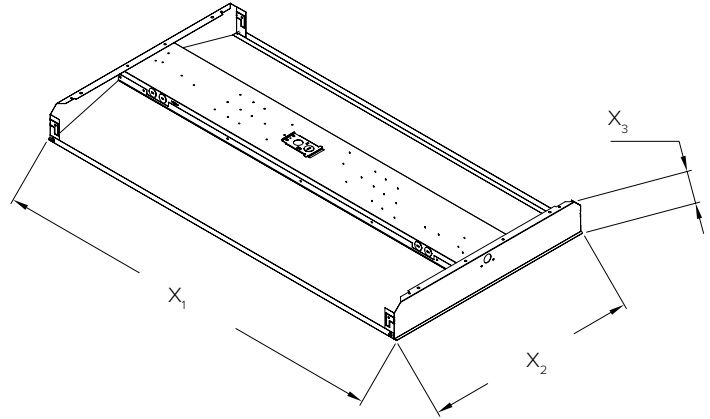


LUMEN CHART

SIZE	SYS WATT	3500K	LPW	4000K	LPW	5000K	LPW
2x2	24	3336	139	3600	150	3552	148
	39	5265	135	5694	146	5460	140
2X4	32	4512	141	4864	152	4672	146
	39	5343	137	5772	148	5538	142

PHOTOMETRIC

POLAR GRAPH

24 39W 3500K

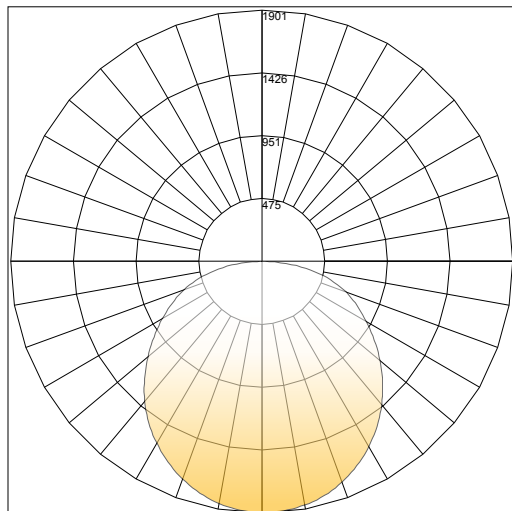

Delivered Lumens: 5772
CRI: 85

AIR SUPPLY/RETURN



Air Supply/Return
slots in Housing

CLOSE UP DETAIL VIEW

