

Client:	
Order #:	
Project:	
Type:	

DESCRIPTION

LumiPack medium wall pack provides a cost-effective, durable and efficient exterior light source for any application with maximum performance and minimum maintenance. The Versapack™ delivers up to 128 lumens per watt of energy-efficient LED performance paired with a traditional design.

FEATURES

- Heavy duty two piece die cast aluminium housing is side hinged for ease of maintenance. Two captive stainless steel door fasteners.
- 1/2" threaded conduit entry with coin plug.
- Dark bronze polyester powder finish for excellent impact, corrosion and UV resistance.
- Power Factor: >.90; THD: <10%
- Clear prismatic borosilicate glass reflector is thermal/shock resistant.
- Temperswitch allows users to select between 5000K, 4000K, and 3000K in the field by simply switching an easily accessible three-position switch. Fixture comes set/standard at 40K.

PERFORMANCE DATA

CRI

70+

CCT

3000K, 4000K, 5000K

Projected Lifetime

>50,000 Hours (L70)

Dimming

0-10V Dimming Standard, 10% down to 100%

Operating Temperature

-40°C to +40°C Ambient

Warranty

5 year Standard
10 year Optional

ORDERING INFORMATION

LUMIPACK						
	B	C	D	E	F	G


A	FIXTURE SERIES	
	LumiPack	Medium Traditional Wall Pack
B	WATTAGE/LUMENS	
	20	20W/2500 ¹
	40	40W/5000 ¹
	60	60W/7500 ¹
	80	80W/10000 ¹
C	CCT	
	30	3000K
	40	4000K
	50	5000K
D	VOLTAGE	
	U	120-277V

E	FINISH	
	BZ	Bronze
F	OPTIONS	
	T	Push Button Photocell
	E	Emergency
G	WARRANTY²	
	-	5 Year Warranty
	10	10 Year Warranty
	10L	10 Year Warranty including labor

¹ Delivered lumens (4000K) - See lumen chart on page 2
² 5 Year Warranty is Standard unless specified




DIMENSIONS

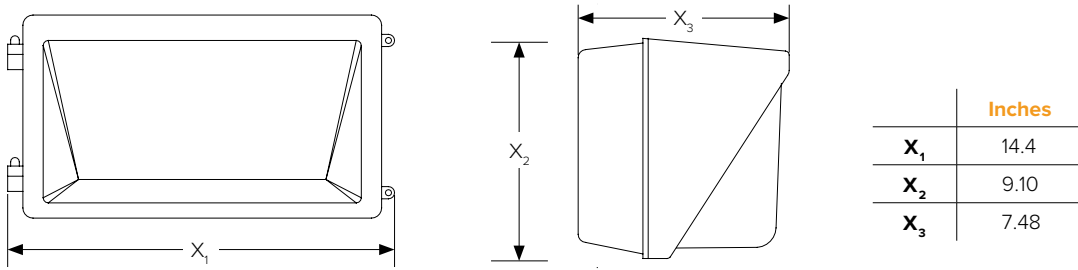


PHOTOMETRICS

Model 60W 4000K

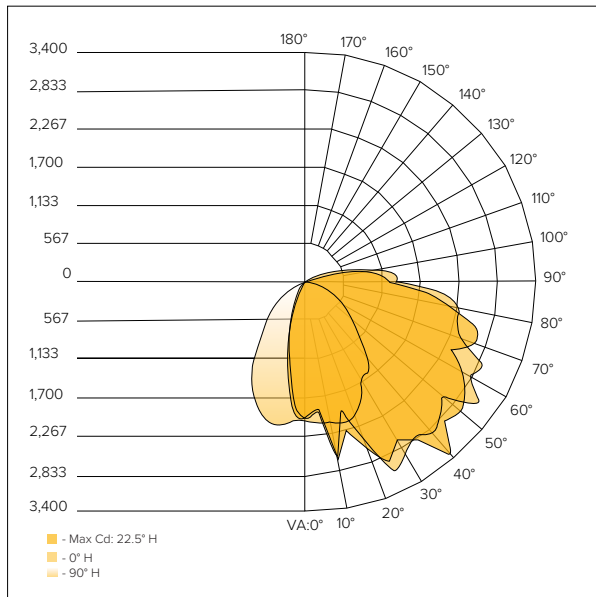

Isofootcandle

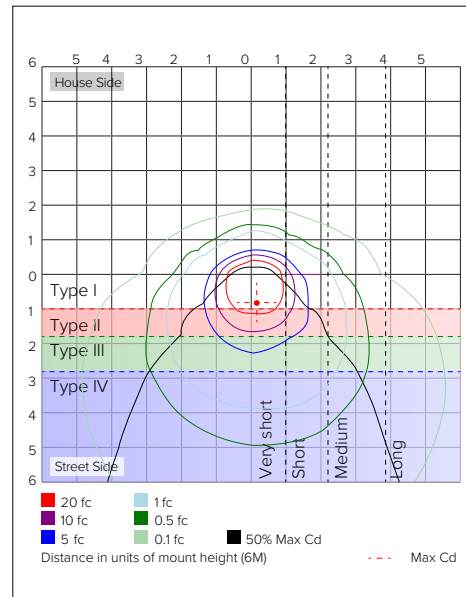

Zonal Lumen Summary

Zone	Lumens	%Luminaire	%Luminaire
0-30	1,490.2	20.5%	20.5%
0-40	2,384.3	32.7%	32.8%
0-60	4,310.5	59.2%	59.2%
60-90	2,258.0	31%	31%
70-100	1,722.5	23.6%	23.7%
90-120	647.9	8.9%	8.9%
0-90	6,568.5	90.2%	90.3%
90-180	708.0	9.7%	9.7%
0-180	7,276.5	99.9%	100%

LUMEN CHART

	Wattage	3000K		4000K		5000K	
		Delivered Lumens	Efficacy	Delivered Lumens	Efficacy	Delivered Lumens	Efficacy
LumiPack-LED20W	20	2400	120	2500	125	2540	127
LumiPack-LED40W	40	4800	120	5000	125	5080	127
LumiPack-LED60W	60	7200	120	7500	125	7620	127