



Client:	
Order #:	
Project:	
Type:	

**PERFORMANCE DATA**

**CRI**

70+ (5000K)  
80+ (4000K and lower)

**CCT**

3000K, 4000K, 5000K

**Projected Lifetime**

>100,000 Hours (L70)

**Dimming**

0-10V Dimming Standard,  
10% down to 100%

**Operating Temperature**

-40°C to +55°C Ambient

**Warranty**

5 year Standard  
10 year Optional

**FEATURES**

**AMARA WALL**

- Conformal Coating LED light engine
- CCT: Standard-3000K, 4000K, & 5000K
- 2700K, Amber, LPS (1800K) Offered for Some Wattages - Consult Factory
- Static Colors Available - Contact Factory

**DISTRIBUTION**

- Types I\* II, III, IV, V (Type I Available in 70w & Higher Only)
- Full Cutoff

**ELECTRICAL**

- Electronic Driver, 120-277V, 50/60Hz or 347/480V, 50/60Hz
- 0-10v Dimmable Driver
- Standard Surge Protection Included (6kV Line-Line; 10k-V Line-Earth)

**CONTROLS (OPTIONAL)**

- Button Eye Photo Control (PC)
- House Side Shield (H)

**HOUSING**

- Cast Aluminum Upper Dome & Spun Aluminum Lower Shade

**FINISH**

- Super Durable Polyester Powder Coat Finish. Custom Finishes Available, Including Patinas and All RAL Colors.

**LISTINGS & RATINGS**

- ETL Listed to UL 1598 Standard for Wet Location.

**ORDERING INFORMATION**

<b>AMARA WALL</b>							
-------------------	--	--	--	--	--	--	--

	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>I</b>
<b>A</b>	<b>FIXTURE SERIES</b>						
	Amara Wall						
<b>B</b>	<b>WATTAGE/LUMENS</b>						
	10	10W/1420					
	15	15W/2029					
	20	20W/2841					
	30	30W/4261					
	40	40W/5524					
	50	50W/7130					
	60	60W/7922					
	70	70W/9533					
	80	80W/10896					
	90	90W/12257					
	105	105W/14333					
	120	120W/16380					
	135	135W/18428					
	155	155/21500					
<b>C</b>	<b>CCT</b>						
	30	3000K					
	40	4000K					
	50	5000K					
<b>D</b>	<b>VOLTAGE</b>						
	UNV	120-277V					
	H	347/480V					
<b>E</b>	<b>FINISH</b>						
	BZ	Bronze					
	BL	Black					
	DBZ	Dark Bronze					
	WH	White					
	GR	Green					
	SM	Silver Metallic					
	GY	Light Gray					
	TBK	Textured Black					
	CC	Custom Color					
<b>F</b>	<b>OPTIONS</b>						
	PC	Button Eye Photo Control					
	H	House Side Shield					
	N	None					
<b>G</b>	<b>MOUNTING</b>						
	PEN	Pendant Mount					
	SMPR	Round Pole Side Mount					
	SMPS	Square Pole Side Mount					
	SMW	Wall Side Mount					
<b>I</b>	<b>WARRANTY<sup>2</sup></b>						
	-	5 Year Warranty					
	10	10 Year Warranty					
	10L	10 Year Warranty including labor					

<sup>1</sup> Delivered Lumens (5000K)

<sup>2</sup> 5 Year Warranty is Standard unless specified

Amara Wall

Lumen Output for Anaheim															
Wattage (Catalog Logic)	10w (10W)	15w (15W)	20w (20W)	30w (30W)	40w (40W)	50w (50W)	60w (60W)	70w (70W)	80w (80W)	90w (90W)	105w (105W)	120w (120W)	135w (135W)	155w (155W)	
Radiant Size (DIA.)	6"	6"	6"	6"	6"	8"	8"	12"	12"	12"	13"	13"	13"	13"	
Input Watts	10.2	14.6	20.4	30.6	40.8	51.0	56.6	67.9	77.6	87.3	101.9	116.5	131.0	152.9	
Optic	CCT	Delivered Lumens													
1 = Type I Clear PC Lens	3K	NOT AVAILABLE						8,156	9,319	10,485	12,260	14,012	15,763	18,390	
	4K	NOT AVAILABLE						8,486	9,698	10,910	12,757	14,580	16,403	19,136	
	5K	NOT AVAILABLE						8,817	10,075	11,335	13,255	15,149	17,041	19,882	
	BUG Rating	NOT AVAILABLE						B3-U0-G2	B3-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B4-U0-G3	Bx-U0-Gx	
2 = Type II Clear PC Lens	3K	1,314	1,877	2,628	3,941	5,110	6,595	7,328	8,819	10,078	11,338	13,259	15,152	17,047	19,888
	4K	1,367	1,953	2,735	4,102	5,086	6,863	7,625	9,176	10,487	11,798	13,796	15,767	17,739	20,694
	5K	1,420	2,029	2,841	4,261	5,524	7,130	7,922	9,533	10,896	12,257	14,333	16,380	18,428	21,500
	BUG Rating	B1-U0-G0	B1-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B2-U0-G1	B2-U0-G1	B2-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G2	B3-U0-G2
3 = Type III Clear PC Lens	3K	1,319	1,884	2,638	3,957	5,130	6,621	7,357	8,854	10,119	11,383	13,312	15,213	17,115	19,968
	4K	1,372	1,961	2,746	4,118	5,106	6,891	7,656	9,213	10,530	11,846	13,852	15,831	17,810	20,777
	5K	1,425	2,037	2,853	4,278	5,546	7,159	7,954	9,571	10,939	12,307	14,391	16,446	18,502	21,586
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B2-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3
4 = Type IV Clear PC Lens	3K	1,203	1,719	2,407	3,611	4,659	6,042	6,714	8,079	9,233	10,388	12,147	13,882	15,617	18,219
	4K	1,252	1,790	2,505	3,757	4,848	6,288	6,986	8,407	9,608	10,809	12,640	14,445	16,251	18,959
	5K	1,301	1,859	2,603	3,904	5,037	6,531	7,258	8,734	9,982	11,229	13,132	15,007	16,883	19,697
	BUG Rating	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B2-U0-G2	B3-U0-G3	B2-U0-G3	B2-U0-G3	B2-U0-G3	B2-U0-G3	B2-U0-G3	B3-U0-G3
F = Type V Clear PC Lens	3K	1,320	1,886	2,640	3,960	5,134	6,626	7,362	8,860	10,125	11,391	13,321	15,223	17,126	19,981
	4K	1,373	1,962	2,748	4,121	5,109	6,895	7,661	9,219	10,536	11,853	12,861	15,841	17,822	20,791
	5K	1,426	2,038	2,854	4,281	5,550	7,163	7,959	9,578	10,946	12,315	14,400	16,457	18,514	21,600
	BUG Rating	B1-U0-G0	B1-U0-G0	B2-U0-G1	B2-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G2	B3-U0-G2	B3-U0-G2	B4-U0-G2	B4-U0-G2	B4-U0-G2	B4-U0-G3
F = Type V with LumaLens	3K	NOT AVAILABLE									8,077	9,231	10,385	12,115	
	4K	NOT AVAILABLE									8,404	9,604	10,805	12,606	
	5K	NOT AVAILABLE									8,732	9,978	11,225	13,097	
	BUG Rating	NOT AVAILABLE									B3-U3-G2	B3-U3-G3	B3-U3-G3	B3-U3-G3	

Please refer to the fixture's IES file for detailed information. Subject to change.

**STYLE OPTIONS**



W5 Shade, 4W Midsection



W5 Shade, 16W Midsection



W5 Shade, Louvered Midsection



W5 Shade, Solid Midsection



Cast Rings (shown w/ W1 shade)



Pole Mount (SMPR/S)



Side Mount, Wall (SMW)

**STYLE OPTIONS**



**W1 Shade, 4W Midsection**



**W1 Shade, 16W Midsection**



**W1 Shade, Louvered Midsection**



**W1 Shade, Solid Midsection**



**W2 Shade, 4W Midsection**



**W2 Shade, 16W Midsection**



**W2 Shade, Louvered Midsection**



**W2 Shade, Solid Midsection**



**W4 Shade, 4W Midsection**



**W4 Shade, 16W Midsection**






**W4 Shade, Louvered Midsection**







**W4 Shade, Solid Midsection**

**Pole Mount Dimensions**

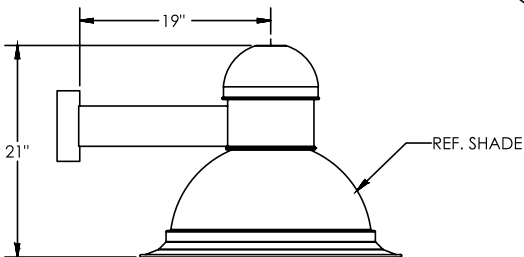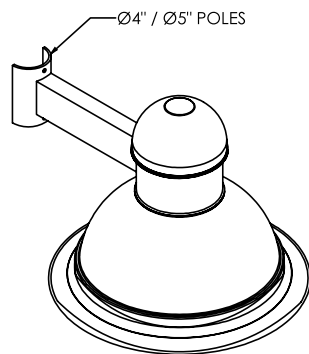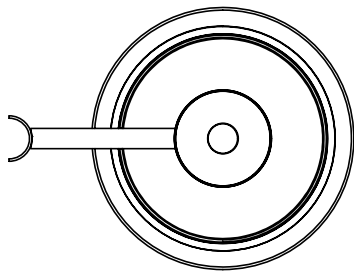


**Wall Mount Dimensions**

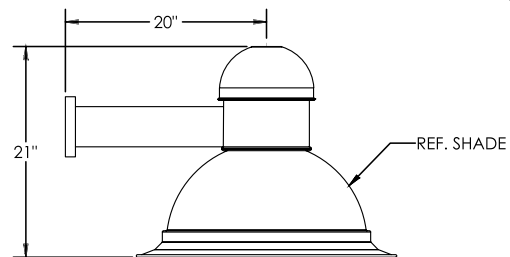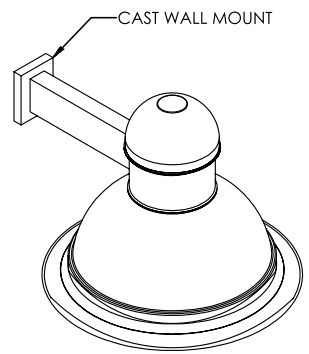


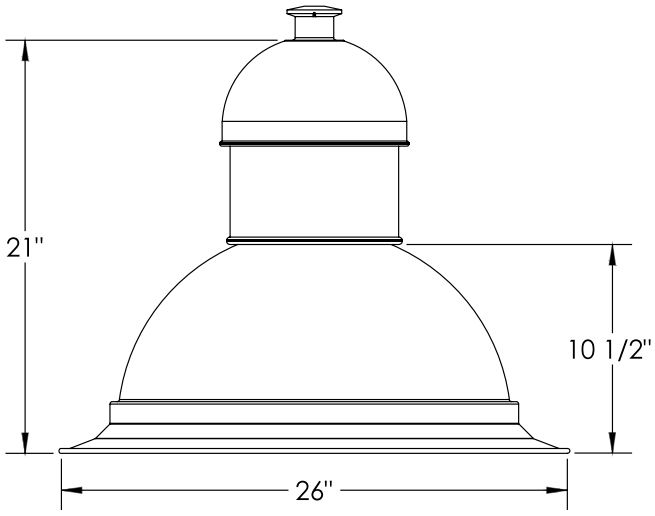


**W1 Shade**

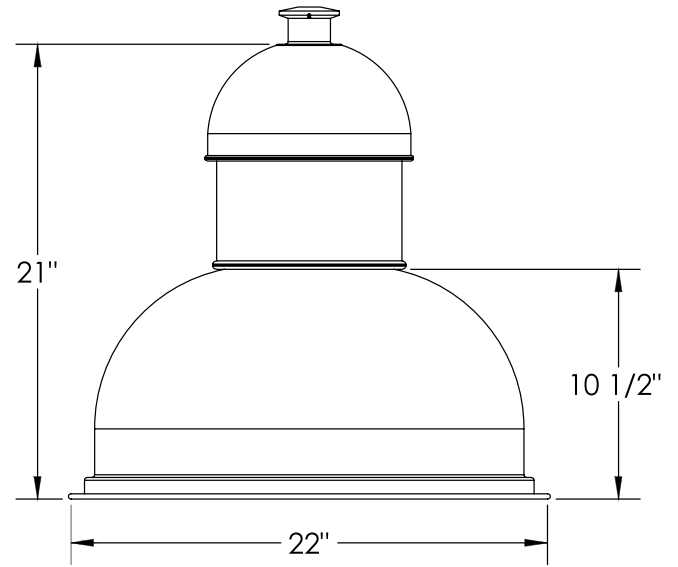

**W2 Shade**

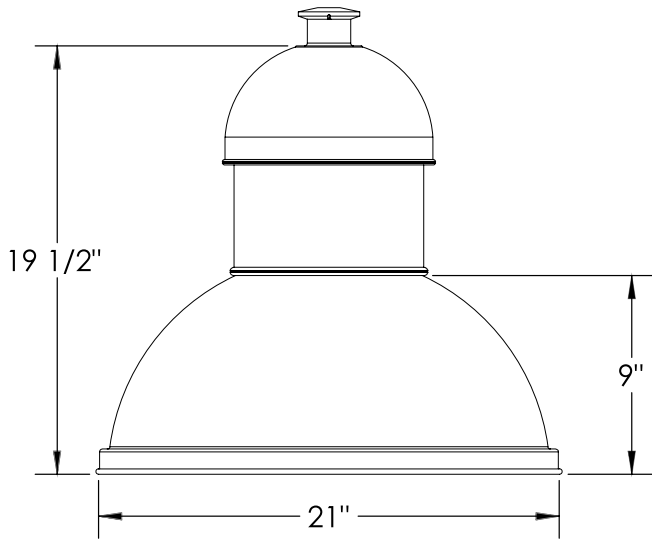

**W4 Shade**

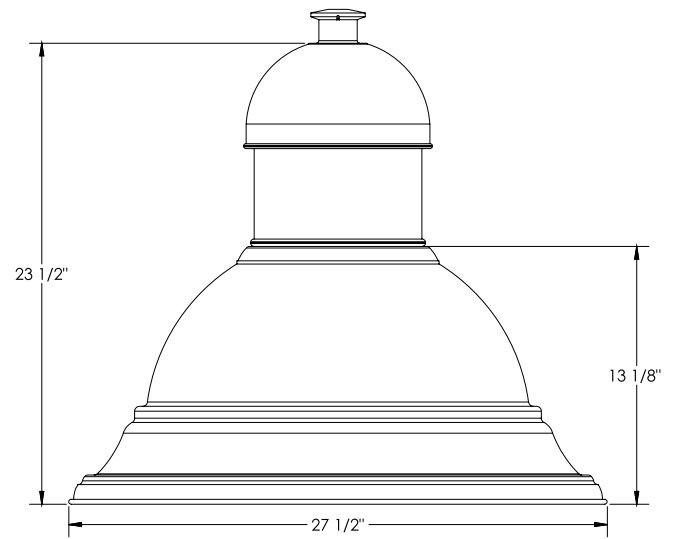

**W5 Shade**