

**DESCRIPTION**

Nola II fixture, an elegant square high-performance light column crafted with Dark Sky Compliance and downward light distribution. Achieve optimal visual comfort with controlled optics, minimizing glare. The square design ensures a unique, wide light distribution, creating an architecturally appealing clover leaf pattern on the pavement. With its minimalistic shape, the Nola delivers distinctive lighting effects at night and serves as a decorative urban element during the day. Ideal for pedestrian areas, precincts, building surrounds, shopping centers, squares, and parks. Illuminate spaces with sophistication and style.



Client:	
Order #:	
Project:	
Type:	

**FEATURES**

**Nola II**

- Conformal Coating LED light engine
- CCT: Amber, LPS (1800K), 2200K, 2700K, 3000K, 4000K, 5000K
- Static Colors Available - Contact Factory

**Distribution**

- Types II, III, IV, V
- Full Cutoff

**ELECTRICAL**

- Electronic Driver, 120-277V, 50/60Hz or 347/480V, 50/60Hz
- 0-10v Dimmable Driver
- Standard Surge Protection Included (6kV Line-Line; 10k-V Line-Earth)

**CONTROLS (OPTIONAL)**

- Button Eye Photo Control (PC)
- House Side Shield (H)

**HOUSING**

- Formed Aluminum Housing with 4 Window Panels.
- Tamper-Proof Stainless Steel Hardware.

**FINISH**

- Super Durable Polyester Powder Coat Finish. Custom Finishes Available, Including Patinas and All RAL Colors.

**LISTINGS & RATINGS**

- ETL Listed to UL 1598 Standard for Wet Location and IP66.
- LED is IP66 Rate

**PERFORMANCE DATA**

**CRI**

70+ (5000K)  
80+ (4000K and lower)

**CCT**

3000K, 4000K, 5000K

**Projected Lifetime**

>100,000 Hours (L70)

**Dimming**

0-10V Dimming Standard,  
10% down to 100%

**Operating Temperature**

-40°C to +55°C Ambient

**Warranty**

5 year Standard  
10 year Optional

**ORDERING INFORMATION**

<b>NOLA II</b>								
----------------	--	--	--	--	--	--	--	--


	B	C	D	E	F	G	I
<b>A</b>	<b>FIXTURE SERIES</b>		<b>CCT</b>		<b>OPTIONS</b>		
	Nola II	Elegant Square Luminaire	30	3000K	N	None	
			40	4000K	PC	Button Eye Photo Control	
<b>B</b>	<b>WATTAGE/LUMENS</b>		50	5000K	H	House Side Shield	
	10	10W/1420 <sup>1</sup>	27	27000K	USB	Dual USB Port*	
	15	15W/2029 <sup>1</sup>	<b>D</b>	<b>VOLTAGE</b>	GFIC	GFI In-Use Cover, Cast Aluminum*	
	20	20W/2841 <sup>1</sup>	UNV	120-277V	GFIP	GFI In-Use Cover, Plastic*	
			H	347/480V	<b>G</b>	<b>DISTRIBUTION</b>	
			<b>E</b>	<b>FINISH</b>	2	Type II	
			BZ	Bronze	3	Type III	
			BL	Black	4	Type IV	
			DBZ	Dark Bronze	5	Type V	
			WH	White	<b>I</b>	<b>WARRANTY<sup>2</sup></b>	
			GR	Green	-	5 Year Warranty	
			SM	Silver Metallic	10	10 Year Warranty	
			GY	Light Gray	10L	10 Year Warranty including labor	
			TBK	Textured Black			
			CC	Custom Color			

<sup>1</sup> Delivered Lumens (5000K)

<sup>2</sup> 5 Year Warranty is Standard unless specified



**DIMENSIONS**

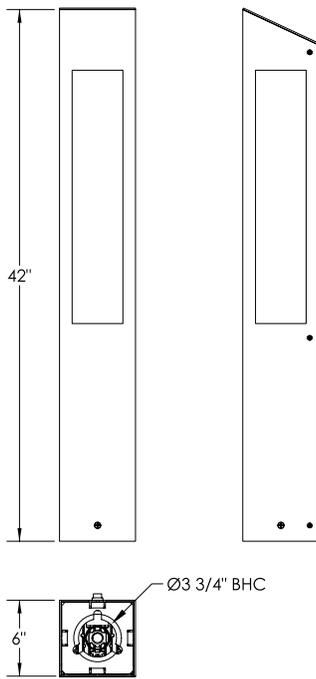

**LUMEN OUTPUT**

**RADIANT™ LED LIGHT ENGINE SPECIFICATIONS:**

Lumen Output for Austin 22 with Clear Lens					
CCT	LED Module	Type 2	Type 3	Type 4	Type 5
<b>5K</b>	10W5K	994	1013	1003	1058
	15W5K	1453	1480	1466	1546
	20W5K	1912	1947	1928	2034
<b>4K</b>	10W4K	947	964	955	1007
	15W4K	1384	1409	1396	1472
	20W4K	1821	1854	1836	1937
<b>3K</b>	10W3K	909	926	917	967
	15W3K	1329	1353	1340	1413
	20W3K	1749	1780	1763	1860
<b>27K</b>	10W27K	890	906	898	947
	15W27K	1301	1325	1312	1384
	20W27K	1712	1743	1726	1821