

# RSFXI | RSFX2 | RSFX3 FLOOD LIGHT

Client:	
Order #:	
Project:	
Туре:	

## **PERFORMANCE DATA**

#### CRI

80+

ССТ

3000K 4000K, 5000K

#### **Projected Lifetime**

190,000 Hours (L70) 58,000 Hours (L90)

Dimming

0-10V Dimming Standard, 10% down to 100%

#### **Operating Temperature**

-20°C to 50°CMax Ambient

Warranty

5 year Standard 10 year Optional



## DESCRIPTION

This compact but powerful flood light is a true innovation practically and aesthetically. The upgraded color tuning switch allows easy access to a range of CCTs based on different environments. Utilizing performance optics and long lasting driver, these landscape flood lights will last for years to come.

OPTIONS

Optional photocell

• 0-10V Dimming

### **FEATURES**

• LISTING UL and CUL listed for wet locations

• HOUSING Solid construction die-cast aluminum body

• FINISH UV stabilized powder coated finish.

## **ORDERING INFORMATION**

RSFX						
	В	С	D	E	F	G

• Finish-Bronze. Color options with adder Build in color adjustable control ranging from 3000K to 5000K

FIXTURE SERIES		С	сст		F	F OPTIONS		
RSFX	Flood Light		30	3000k		-	No Sensor	
WATTAGE	WATTAGE/LUMENS (RSFXI')		40	4000K		SF	Slip Fitter	
105	105W/144901		50	5000K <sup>2</sup>		SFS	Knuckle	
120	120W/165601	D	VOLTA	VOLTAGE		TR	Trunnion	
150	150W/207001		U	120-277V		PC	Photocell	
WATTAGE	WATTAGE/LUMENS (RSFX2)		FINISH			OS	Occupancy Sensor	
50	50W/69001		WH	White	G	WARRANTY <sup>3</sup>		
70	70W/9660 <sup>1</sup>		BL	Black		-	5 Year Warranty	
90	90W/124201		ΒZ	Bronze		10	10 Year Warranty	
WATTAGE	E/LUMENS (RSFX3)		CU	Custom		10L	10 Year Warranty including labor	
15	15W/20701							
25	25W/34501							
36	36W/46081							

<sup>1</sup> Delivered Lumens (4000K)


<sup>2</sup> For more information on the Motion Sensor features and benefits see Page 2

<sup>3</sup> 5 Year Warranty is Standard unless specified







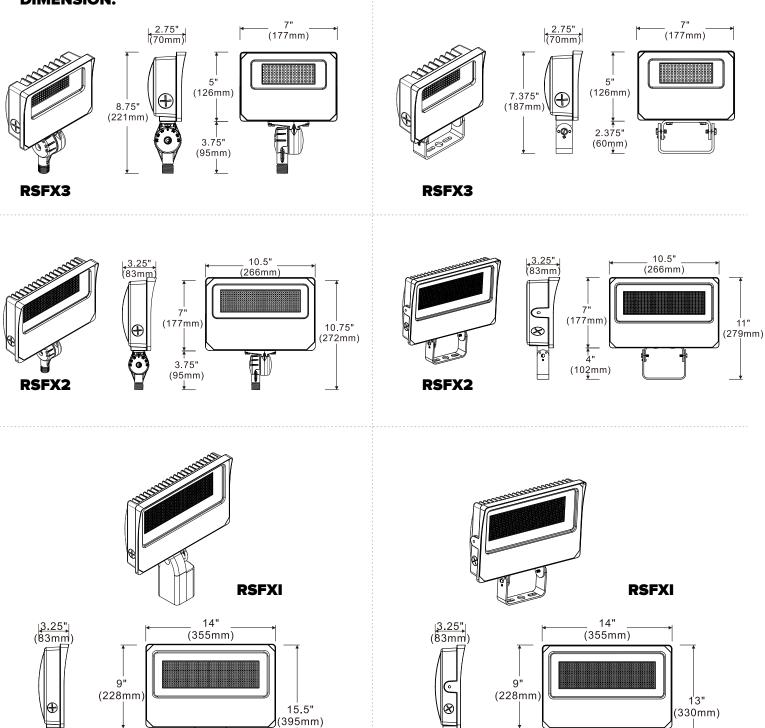

4"

(102mm)

Ĵ

€



6

6.625"

(167mm)

ŧ