



Client:	
Order #:	
Project:	
Type:	

DESCRIPTION

Presenting the Solara Round Bulkhead Wall Pack – a flexible lighting solution offered in Open, Cutoff, and Grid styles. Meticulously crafted with a sturdy die-cast aluminum housing, this wall pack is designed to deliver superior light output. The UV-stabilized polycarbonate opal lens guarantees durability while eliminating LED hot spots, ensuring a consistent and glare-free illumination. Vandal-resistant and suitable for mounting heights between 8 to 20 feet, the Solara wall pack seamlessly blends durability with functionality to meet your outdoor lighting requirements.

FEATURES

- Three frame styles provide decorative appearance for effective accent and security lighting
- Energy-saving alternative to traditional HID fixtures
- Polycarbonate opal vandal-resistant lens eliminates LED hot spots
- 8' – 20' mounting heights
- Optional energy-saving photocells and occupancy sensor available
- Maximize energy savings with efficacies as high as 111 lm/W

PERFORMANCE DATA

CRI

80+

CCT

3000K, 4000K, 5000K

Projected Lifetime

>137,000 Hours (L70)

Dimming

0-10V Dimming Standard,
10% down to 100%

Operating Temperature

-40°C to 50°C Ambient

Warranty

5 year Standard
10 year Optional

ORDERING INFORMATION


SOLARA		B	C	D	E	F	G	H		
A	FIXTURE SERIES			C	CCT	F		OPTIONS		
	Solara				30	3000K	SF		Single fuse	
					40	4000K	DF		Double fuse	
B	WATTAGE/LUMENS				50	5000K	SP10		10kV surge protection	
	20	20W/2230 ¹			D	VOLTAGE	PC		Photocell, 120-277V	
						U	120-277V	OCC-S2X		Integral occupancy and motion sensor with dimming
					E	FINISH			EM/6W	6-watt emergency battery
						BZ	Bronze	G		STYLE
						WH	White	O		Open
								C		Cutoff
								G		Grid
								H		WARRANTY²
								-		5 Year Warranty
								10		10 Year Warranty
								10L		10 Year Warranty including labor

¹Delivered Lumens (5000K)

² 5 Year Warranty is Standard unless specified




DIMENSIONS

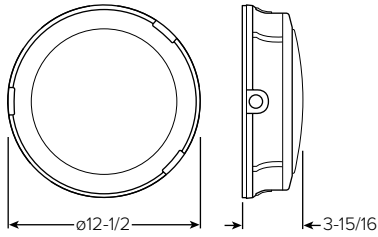

FOOTCANDLE DISTRIBUTIONS

OPEN




Footcandle calculations based on standard building reflectance of .10 with a ground reflectance of .0 and a light loss factor of .90.
Fixture installed at 10' mounting height.

Efficacy: 112 lm/W
Flux: 2230 lm
CRI: 80
CCT: 4000K
BUG Ratings: B1-U1-G0

Lorem ipsum


CUTOFF




Efficacy: 93 lm/W
Flux: 1858 lm
CRI: 80
CCT: 4000K
BUG Ratings: B1-U1-G0

FIXTURE DETAILS


OPEN

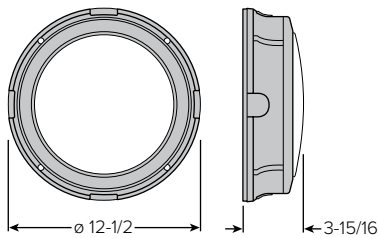

CUTOFF



GRID



BACKVIEW

