



Client:	
Order #:	
Project:	
Type:	

PERFORMANCE DATA

CRI

70+

CCT

2700K, 3000K, 4000K 5000K

Projected Lifetime

>50,000 Hours (L70)

Dimming

0-10V Dimming Standard,
10% down to 100%

Operating Temperature

-40°C to +40°C Ambient

Warranty

5 year Standard
10 year Optional

DESCRIPTION

The Luma Top luminaire offers a sleek and sophisticated appearance coupled with unparalleled practicality, making it an ideal solution for various lighting applications. Specifiers, architects, and lighting designers value its simplistic style and durable design, recognizing it as a versatile and reliable lighting option.

FEATURES

- Distribution
Types II, III, IV, V
Full Cutoff
- Electrical
Electronic Driver, 120-277V, 50/60Hz or 347/480V, 50/60Hz
0-10v Dimmable Driver
Standard Surge Protection included (6kV line-line; 10k-V line-earth)
- Controls (Optional)
Button eye photo control (PC)
- Housing
Housing and arms are constructed of high quality aluminum. 3" slip fitter.
- Finish
Super durable polyester powder coat finish. Custom finishes available, including patinas and all RAL colors.
- Listings & Ratings
ETL listed to UL 1598 standard for wet location.
LED is IP66 Rated

ORDERING INFORMATION


LUMA							
-------------	--	--	--	--	--	--	--

	B	C	D	E	F	G	I
A	FIXTURE SERIES						
	LUMA						
B	WATTAGE/LUMENS						
	40	40W/4526 ¹					
	50	50W/5539 ¹					
	60	60W/6265 ¹					
	70	70W/6710 ¹					
	80	80W/7669 ¹					
	90	90W/8628 ¹					
C	CCT						
	27	2700K					
	30	3000K					
	40	4000K					
	50	5000K					
D	VOLTAGE						
	U	120-277V					
	H	347-480V					
E	FINISH						
	BL	Black					
	BZ	Bronze					
	DBZ	Dark Bronze					
	WH	White					
	GR	Green					
	SM	Silver Metallic					
	GY	Light Gray					
	TBK	Textured Black					
	CC	Custom Color (Consult Factory)					
F	DISTRIBUTION						
	2	Type II					
	3	Type III					
	4	Type IV					
	5	Type V					
G	OPTIONS						
	FS	Fuse, Single					
	PC	Button Eye Photo Control					
I	WARRANTY²						
	-	5 Year Warranty					
	10	10 Year Warranty					
	10L	10 Year Warranty including labor					

¹Delivered Lumens (5000K)

² 5 Year Warranty is Standard unless specified

DIMENSIONS

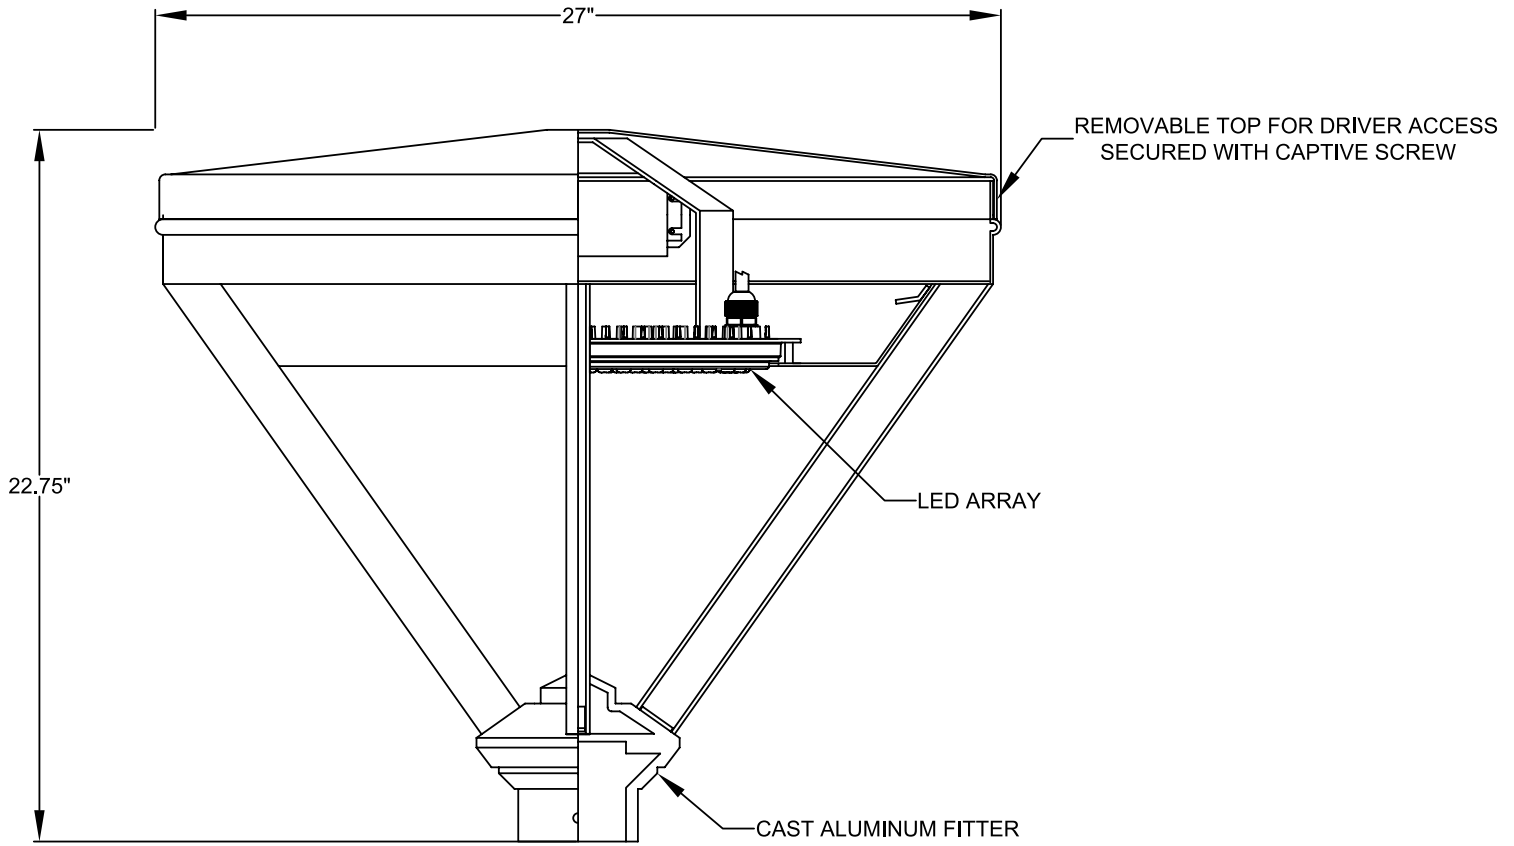

LUMA LED LIGHT ENGINE SPECIFICATIONS:

Lumen Output for LUMA						
CCT	LED Module	Input Watts	Type 2	Type 3	Type 4	Type 5
5K	40W5K	40	4429	4437	4285	4526
	50W5K	50	5491	5493	5286	5539
	60W5K	60	6100	5989	5878	6265
	70W5K	70	6318	6451	6335	6710
	80W5K	80	7221	7372	7240	7669
	90W5K	90	8123	8294	8145	8628
4K	40W5K	40	4274	4282	4135	4367
	50W4K	50	5298	5301	5101	5345
	60W4K	60	5887	5779	5672	6046
	70W4K	70	6097	6225	6113	6475
	80W4K	80	6968	7114	6986	7400
	90W4K	90	7839	8003	7860	8326
3K	40W3K	40	4119	4126	3985	4209
	50W3K	50	5106	5109	4916	5152
	60W3K	60	5673	5570	5466	5826
	70W3K	70	5876	6000	5892	6241
	80W3K	80	6715	6856	6733	7132
	90W3K	90	7555	7713	7575	8024

*Please refer to the fixture's IES file for detailed information. Subject to change.