

Client:	
Order #:	
Project:	
Type:	

**PERFORMANCE DATA**

**CRI**

70+

**CCT**

3500K, 4000K, 5000K

**Projected Lifetime**

>50,000 Hours (L70)

**Dimming**

0-10V Dimming Standard,  
10% down to 100%

**Operating Temperature**

-20°C to +40°C Ambient

**Warranty**

5 year Standard  
10 year Optional

**DESCRIPTION**

Illuminate your space with the low-profile ZENON canopy light, an ideal choice for low-power utility or apartment garage lighting. Perfect for security, entryways, and perimeter lighting, the ZENON boasts a sturdy construction and a damp location-rated housing. With an optional motion sensor feature, it becomes a versatile solution. Additionally, the ZENON is well-suited for replacing existing old canopies, seamlessly covering various sizes and eliminating dark spots. Experience a new look without the need for additional painting after installation, making the ZENON the perfect upgrade solution.

**FEATURES**

- ETL Listing  
• ETL listed for dry & damp locations

- LEDs  
• LM-80 certified high performance LEDs

- DLC Listing  
• DLC listed at 4000K and 5000K

- Housing & Finish  
• Die-cast aluminum with durable dark bronze finish  
• Prismatic PC refractor, non-yellowish

- Drivers  
• Constant current LED driver  
• 0-10V dimmable

- Installation  
• Wall or junction box mount through 2x NPT 1/2" holes

**ORDERING INFORMATION**

<b>ZENON</b>						
--------------	--	--	--	--	--	--

	B	C	D	E	F	G
<b>A</b>	<b>FIXTURE SERIES</b>					
	ZENON					
<b>B</b>	<b>WATTAGE/LUMENS SIZE 4ft</b>					
	10	10W/1186lm <sup>1</sup>				
	20	20W/2360 <sup>1</sup>				
	36	36W/4442 <sup>1</sup>				
	55	55W/6694 <sup>1</sup>				
<b>C</b>	<b>CCT</b>					
	35	3500K				
	40	4000K				
	50	5000K				
<b>D</b>	<b>VOLTAGE</b>					
	U	120-277V				
<b>E</b>	<b>FINISH</b>					
	WH	White				
<b>F</b>	<b>OPTIONS</b>					
	E	Emergency				
	EM	Motion sensor				
	VRS	Vandal Resistant Screws				
<b>G</b>	<b>WARRANTY<sup>2</sup></b>					
	-	5 Year Warranty				
	10	10 Year Warranty				
	10L	10 Year Warranty including labor				

<sup>1</sup>Delivered Lumens (5000K)


<sup>2</sup> 5 Year Warranty is Standard unless specified

**DIMENSION**

Length (L) 15.59" (396mm)

Width (W) 15.59" (396mm)

Height (H) 3.22" (82mm)


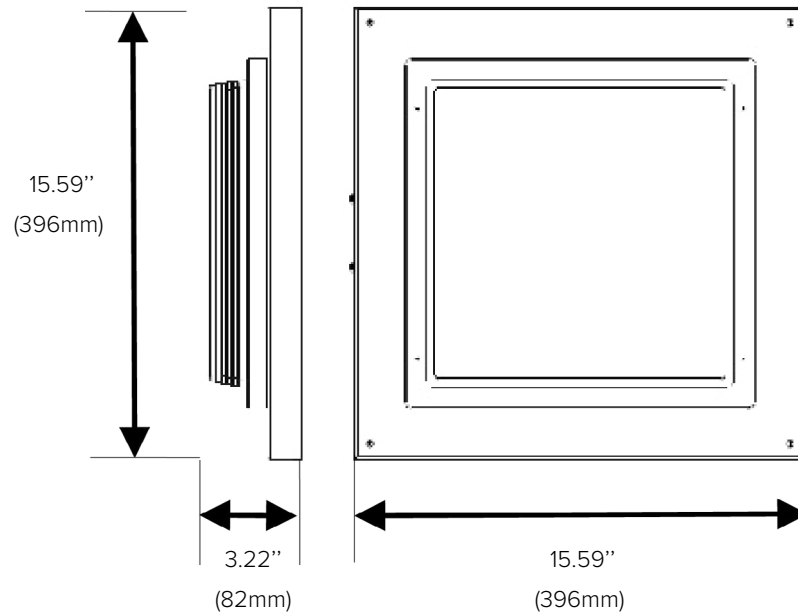


Model	Input Voltage	Input Power	System Lumens	System Efficacy	ETL	DLC
ZENON10HU840D21	120-277V	10W	1135lm	115LPW	Yes	5.0Std
ZENON10HU850D21	120-277V	10W	1186lm	121LPW	Yes	5.0Pm
ZENON20HU840D21	120-277V	20W	2205lm	120LPW	Yes	5.0Pm
ZENON20HU850D21	120-277V	20W	2360lm	131LPW	Yes	5.0Pm
ZENON36HU840D21	120-277V	36W	4414lm	117LPW	Yes	5.0Pm
ZENON36HU850D21	120-277V	36W	4442lm	121LPW	Yes	5.0Pm
ZENON55HU840D21	120-277V	55W	6621lm	120LPW	Yes	Pending
ZENON55HU850D21	120-277V	55W	6694lm	133LPW	Yes	Pending

PERFORMANCE SUMMARY	
Input Freq.	50/60Hz
Power Factor	0.9 min.
THD	20%max
Color Temp.	5000K Premium, 4000K optional
Controls	0-10V dimming (10-100%)
CRI	80 min.

PERFORMANCE SUMMARY	
Operating Temp.	-20°C to 40°C
Ingress Protection	Damp location
L70 Life	50,000 hours
Warranty	5 years

**OTHER VIEWS**

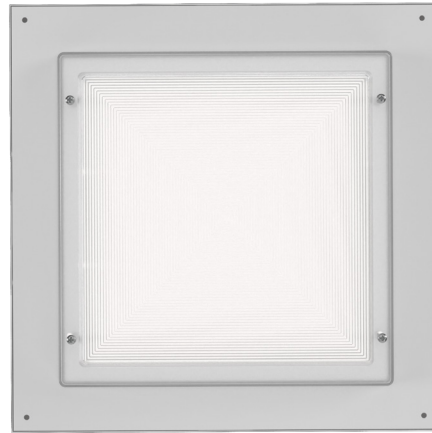

Model	Input Voltage	Input Power	CCT	System Lumens	System Efficacy	ETL
ZENON20HU853D22	120-277V	13/16/20W	30/40/50K	2400lm max.	120LPW	Yes
ZENON55HU853D22	120-277V	36/45/55W	30/40/50K	6600lm max.	120LPW	Yes

**PERFORMANCE SUMMARY**

Input Freq.	50/60Hz
Power Factor	0.9 min.
THD	20%max
Color Temp.	CCTselectable
Controls	0-10V dimming (10-100%)
CRI	80 min.
Operating Temp.	-20°C to 40°C
Ingress Protection	Dry & damp locations
L70 Life	50,000 hours
Warranty	5 years